

# LED control card

## User Manual



Before you use the LED controller, please read this file first and save it for future.

**We will struggle and serve for the booming development of LED industry!**

**BX-6Q3**

## Statement

Any companies or privates cannot copy, transcribe or translate part or whole content of this file without our written permission. And cannot use it on any business or benefit filed with any forms.

The specifications and information which are mentioned on the file is for reference only, if there' s update, we will not inform you. This file is only for guidance, and all information will not be for any promises.

# CATALOG

Brief Introduction.....	1
About Software.....	1
Guiding.....	2
Safety Notes.....	2
Function Introduction.....	3
Control Area.....	3
Dynamic Area.....	3
Areas in on program.....	3
Send programs by many platforms.....	3
Support APP.....	3
Cluster sending programs.....	4
Send program in timing.....	4
Turn on/off in timing.....	4
Test button.....	4
Auto correction.....	4
IR controller.....	4
Switch program by button.....	4
Colorful frame and background.....	5
Sensors.....	5
Multi languages.....	5
SDK.....	5
Technical Specifications.....	6
Size.....	7
Left panel icon .....	8
Right panel icon.....	9

# Brief Introduction

Thanks for ordering LED control card. The design of the control card is according to the international and industrial standard, but if the operations are incorrect, it will probably bring you personal injury and financial harm. As to avoid these and win more from your equipment, please obey the specifications of this file.

## About Software

Cannot do any modification, decompilation, disassembling, decoding or reverse engineering on our software, it's illegal.

## Characteristics

- ◆ Used for super long intel full color screen and cluster control, one card for one screen.
- ◆ Text moving smoothly, abundant text types, like: vertical words, gradient words, colorful words.
- ◆ Overlay functions by the abundant background effects and colorful texts.
- ◆ High refreshment, high gray scale, and support animation, video.
- ◆ The best technology and stable quality. 3.5V-6V , -40°C ~ 80°C working temperature.
- ◆ Support firmware update online.
- ◆ Support cluster management, multi programs editing, multi areas display and multi languages.
- ◆ Support temperature, temperature&humidity and brightness sensor.
- ◆ Support playing program, lock screen, adjust brightness, turn on/off, test screen by IR controller.
- ◆ Can edit , send and control screen on iLEDCloud.
- ◆ Support 512 programs and each program has 16 areas
- ◆ Support graphic, subtitle, animation, time, dial, timer, temperature, temperature&humidity, weather broadcast.
- ◆ Support colorful program frames and area frame.

# Guiding

## Safety Notes

- ◆ Input voltage is 5V, voltage range is from 3.5V-6V, please make sure the quality of the power supply of BX-6Q series.
- ◆ Please make sure that all the power supply cables are plugged off when you want to connect or plug off any signal or controlling cables.
- ◆ Please make sure that all the power supply cables and signal cables are plugged off when you need to put in or take off the hardware equipment.
- ◆ Please take off the power supply of LED video processor before you do any hardware operations, and ESD by touching the ground.
- ◆ Please make sure the environment is clean, dry and ventilated when you use this product, also, do not put this product to a high temperature and wet environment.
- ◆ This product is electronic products, please keep away from fire, water source and flammable&combustible products.
- ◆ There's high pressure components in this products, please do not open the box and repair it by yourself.
- ◆ Turn off the power supply immediately when you find smoking, peculiar smell or something unusual. And contact with us soon.

# Function Introduction

The release of BX-6Q brings a good feedback from the market, and it is now the main stream of LED lintel full color screen and LED advertising box. With 100M LAN port on board, USB port and 4 GB FLASH.

## **Control Area**

Total pixels≤384K , 384\*1024、 512\*768、 1024\*384、 2048\*192、 3072\*128、 4096\*96、 6144\*64、 12288\*32.

## **Dynamic Area**

We offer C#, java, SDK, VB, C++ for static and dynamic area; Static area support “save the data when power is off” ; Support 32 graphic areas, including colorful words and background, each static area is not conflicted; We offer protocol for dynamic area too, support 32 dynamic area (the storage of each area is 1M), it won’ t save when the power is off. Dynamic area can relate to many static areas, offer many playing modes.

## **Areas in on program**

Users can add areas in one program as their requirements: graphic, subtitle, time, animation, frame areas and so on.

## **Send programs by many platforms**

When you finish the editing of all the programs, you send program by LedshowTW directly, or by iLEDCloud. ILEDCloud is offered by onbon, the corn is Alibaba cloud, which is reliable and stable. To use this platform, users only need a browser, then, can edit program by remote control, preview program and play the program in a fixed time. Also, users can log in the iLEDCloud by mobile phone, pad and pc.

## **Support APP**

Users can install APP software “ledshow” , by APP, users can search, add screens automatically, turn on/off, brightness, volume, etc. Edit program, add video, text, graphic, time area, timer area, send program, share program,etc. For software, it supports play in

multi lines, dynamic preview, multi languages, video transcoding, optimize video effect and support zoom in and out by fingers. "Ledshow" support not only YQ series, but also 5<sup>th</sup> and 6<sup>th</sup> generation and 6Q intel full color control cards.

## **Cluster sending programs**

This product used for all kinds of cluster systems on LED intel full color screen and LED advertising boxes. By the stable and high efficient LAN mode, users can control , manage and maintain the screens which are in different areas, as to realize the cluster sending programs.

## **Send program in timing**

Users can set the time you want to send the program, then, the program will be sent according to the time you set.

## **Turn on/off in timing**

The function of "timing turn on/off" , users can set the time you want to turn on and the time you want to turn off. If users are not convenient to operate all the time, that will be the best choice.

## **Test button**

The screen display will be worse if the led screen has been used for a long time, so, it needs test in a fixed time. With the function of "test button" , users can test the broken lamps, brightness and colors by several steps.

## **Auto correction**

The system will do correction automatically, like our mobile phone and computer. So, users do not need to do it manually.

## **IR controller**

Users can select programs , turn on/off screen by IR controller. Also you can adjust the screen brightness, and test the screen.

## **Switch program by button**

Users can also switch the programs by button on the board.

## **Colorful frame and background**

The software offers many kinds of colorful frames and backgrounds.

## **Sensors**

We offer temperature, temperature&humidity, and brightness sensor for users, as to avoid the losses by unknown temperature, humidity and brightness.

## **Multi languages**

Software supports many languages like Chinese, English, French, German, Greek language, Russian, Japanese and so on.

## **SDK**

Support SDK on static area and dynamic area. We offer you C#, java,SDK,VB,C++; We also offer you the completed SDK port and technological service.



# Technical Specifications


Screen index	
Parameters	Specification
Control size	384*1024、512*768、1024*384、2048*192、3072*128、4096*96、6144*64、12288*32
Total pixels	384K
The maximum width	No limit
The maximum height	1024

Details	
Input power	5V(3.5V-6V), please make sure the quality of your power supply
Voltage	≤4W
Working temperature	-40℃~80℃
Size	93mm $\phi$ 96.6mm $\phi$ 27mm


Technical parameters	
Storage	4GByte
Gray scale	65536 grade
Usage	Use on intel full color screen and cluster control, one card for one screen
Software function	cluster management/edit multi programs/display multi areas/multi languages
Program type	normal program/share program
Program quantity	Support 512 programs, each program supports 16 areas
Area type	
Dynamic area	Support 4 dynamic areas, the storage of each dynamic area is 1M
Frame	Colorful program frame and area frame
Background	Colorful background
Subtitle	vertical words, gradient words, colorful words
Clock	Dial/Chinese&English clock/timer (all support many groups)
Communication port	Standard 100M LAN port and USB port, support 3G wireless transmitting
Sensor	temperature/temperature&humidity/brightness
IR controller	Select program/lock screen/adjust brightness/turn on&off/test screen
Adjust brightness	16 grade brightness, support adjust brightness by different time automatically/adjust brightness on software/adjust brightness by IR controller/adjust brightness automatically

Turn on/off remotely	Support turn on&off in timing/turn on&off on software/turn on&off by IR controller
SDK	Offer DLL; Offer C#,java,SDK,VB,C++
Software	LedshowTW (after version V16.06.06.00)
User manual	BX-6Q User manual

## Size

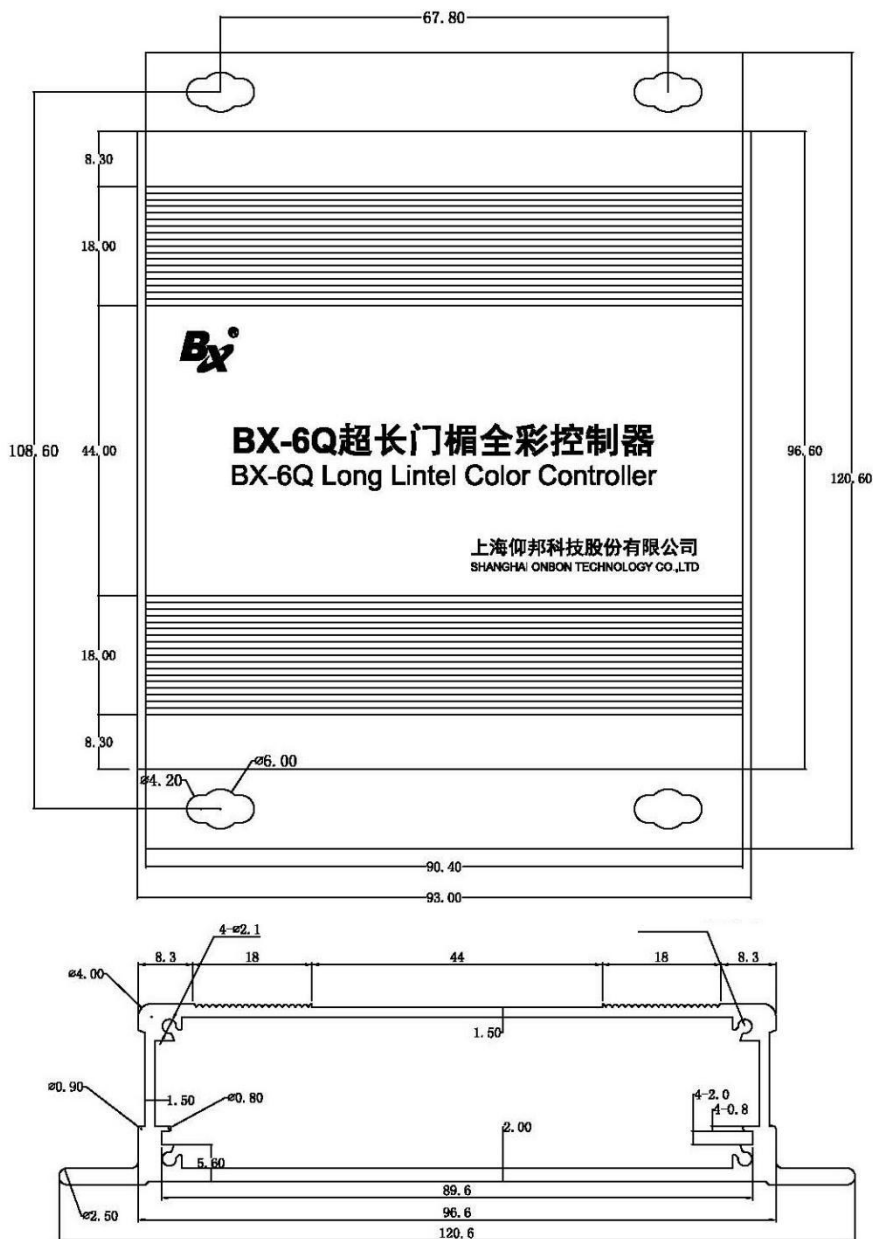

## Left panel icon

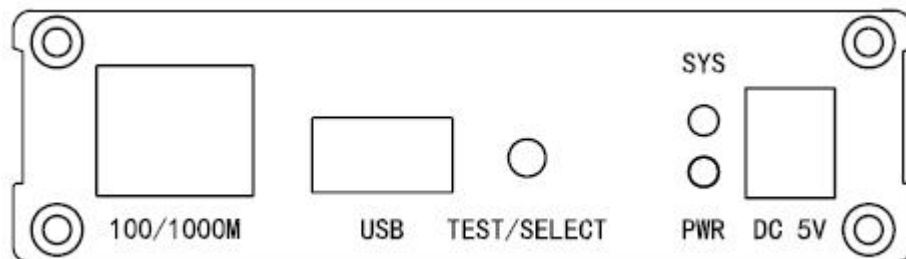

100/1000M interface	
100/1000M	Ethernet interface ,communicate with computer

<b>USB interface</b>	
USB	USB interface , support USB port transmit programs


<b>TEST/SELECT button</b>	
TEST/SELECT	Screen test button

<b>SYS indicator</b>	
SYS	System indicator

<b>PWR indicator</b>	
PWR	Power indicator

Power supply	
DC5V	5V (3.5V-6V)

## Right panel icon

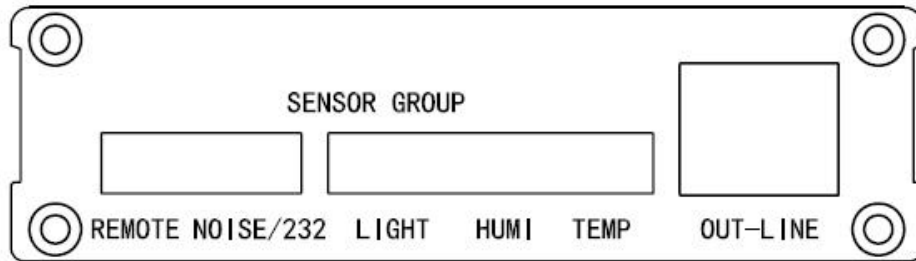

### 按键说明

REMOTE	Remote controller interface
NOISE/232	Noise sensor interface
LIGHT	Brightness sensor interface
HUMI	HUMI sensor interface
TEMP	Temp sensor interface
OUT-LINE	Scan data output port , connect with full color receiving card

## Contact Us

### Shanghai ONBON Technology Co.,ltd (Headquarters)

Address: 7 Floor, Tower 88, 1199#, North Qinzhou Road, Xuhui District, Shanghai City, China

Tel Phone: 086-21-64955136

Fax: 086-21-64955136

Website: [www.onbonbx.com](http://www.onbonbx.com)

### ONBON (Jiangsu) Optoelectronic Industrial Co.,LTD

Address: 1299#, Fuchun Jiang Road, Kunshan City, Jiangsu Province, China

### Sales Contacts

Tel: 0086-15921814956 0086-15800379719

Email: [onbon@onbonbx.com](mailto:onbon@onbonbx.com)

### Second Development

Tel: 0512-66589212

Email: [dev@onbonbx.com](mailto:dev@onbonbx.com)

### iLEDCloud

Website: <http://www.iledcloud.com/>



Public Wechat



ONBON APP